


Ø10mm RF Cable | External Antenna Connection Specifications

Electrical		
Length	2 m	3 m
VSWR (Max.)	1.2	1.2
Loss (Cable Only) ¹	2 m	3 m
Loss @900 MHz, dB	0.256	0.384
Loss @2 GHz, dB	0.392	0.588
Loss @2.5 GHz, dB	0.444	0.666
Loss @5.8 GHz, dB	0.710	1.065
Loss (with 2 Connectors) ¹	2 m	3 m
Loss @900 MHz, dB	0.556	0.684
Loss @2 GHz, dB	0.692	0.888
Loss @2.5 GHz, dB	0.744	0.966
Loss @5.8 GHz, dB	1.010	1.365
Impedance	50 Ω (Nominal)	
Frequency Range	DC to 6 GHz (Max.)	
Dielectric Withstanding Voltage	2,000 V (rms)	
Insulation Resistance	5,000 MΩ (Min.)	
Mechanical		
Durability	500 Cycles (Min.)	
Temperature	-45°C to +85 °C (Cable)	
Bending Radius	25.4 mm (Min.)	
Cabling		
Conductor	Copper Clad Aluminum, 1 Core, Ø2.74 mm	
Insulation	PEF, Thickness 2.2 mm, Outer Ø7.24 mm	
Binder	Sealed Aluminum Mylar Tape	
Braid Shield	Aluminum Alloy Wire, 85%↑ Coverage	
Jacket	PVC or PE, Outer Ø10.3±0.25 mm	
Connector		
Body	Brass, Ni or Tri-alloy Surface Plating	
Center Conductor	Brass, Au or Ag Surface Plating	
Insulator	PTFE	
Other	Brass, Ni Surface Plating	
Certification(s)		
IEC	IEC 60169-16	



Diagram

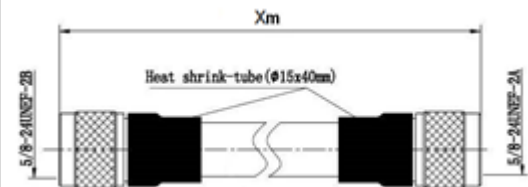

Ordering Information

Part Number: GE.CA-N002-00

2m Ø10mm RF Cable with 2 N-male Connectors

Part Number: GE.CA-N003-00

3m Ø10mm RF Cable with 2 N-male Connectors

Please contact us for other cable lengths.

¹the loss values have tolerance of up to 0.4 dB

Version: 04 Mar 2021


Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Ø5mm RF Cable | External Antenna Connection Specifications

Electrical	
Length	1 m
VSWR (Max.)	1.20 (0 to 3 GHz); 1.35 (3 to 6 GHz)
Loss (Cable Only) ¹	
Loss @900 MHz, dB	0.326
Loss @2 GHz, dB	0.393
Loss @2.5 GHz, dB	0.554
Loss @5.8 GHz, dB	0.865
Loss (with 2 Connectors) ¹	
Loss @900 MHz, dB	0.626
Loss @2 GHz, dB	0.793
Loss @2.5 GHz, dB	0.854
Loss @5.8 GHz, dB	1.165
Impedance	50 Ω (Nominal)
Frequency Range	DC to 6 GHz (Max.)
Dielectric Withstanding Voltage	2,000 V (rms)
Insulation Resistance	5,000 MΩ (Min.)
Mechanical	
Durability	500 Cycles (Min.)
Temperature	-45°C to +85 °C (Cable)
Bending Radius	12.7 mm (Min.)
Cabling	
Conductor	Bare Copper Wire, 1 Core, Ø1.12 mm
Insulation	PEF, Outer Ø2.95 mm
Binder	Sealed Aluminum Mylar Tape
Braid Shield	Tinned Copper Wire, 88%↑ Coverage
Jacket	PVC or PE, Outer Ø5 mm
Connector	
Body	Brass, Ni or Tri-alloy Surface Plating
Center Conductor	Brass, Au or Ag Surface Plating
Insulator	PTFE
Other	Brass, Ni Surface Plating
Certification(s)	
IEC	IEC 60169-16



Diagram

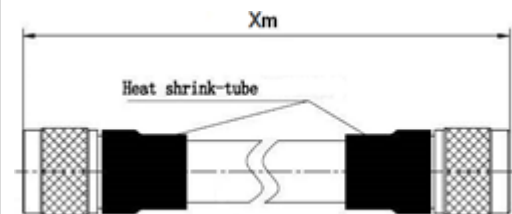

Ordering Information

Part Number: GE.CA-N001-01

1m Ø5mm RF Cable with 2 N-male Connectors

Please contact us for other cable lengths.

¹the loss values have tolerance of up to 0.4 dB

Version: 04 Mar 2021


Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Ø10mm RF Cable (LMR400) | External Antenna Connection Specifications

Electrical			
			Special Item
Length	2 m	3 m	5m
VSWR (Max.)	1.2	1.2	1.2
Loss (Cable Only) ¹	2 m	3 m	5 m
Loss @900 MHz, dB	0.256	0.384	0.640
Loss @2 GHz, dB	0.392	0.588	0.980
Loss @2.5 GHz, dB	0.444	0.666	1.110
Loss @5.8 GHz, dB	0.710	1.065	1.775
Loss (with 2 Connectors) ¹	2 m	3 m	5 m
Loss @900 MHz, dB	0.556	0.684	0.940
Loss @2 GHz, dB	0.692	0.888	1.280
Loss @2.5 GHz, dB	0.744	0.966	1.410
Loss @5.8 GHz, dB	1.010	1.365	2.075
Impedance	50 Ω (Nominal)		
Frequency Range	DC to 6 GHz (Max.)		
Dielectric Withstanding Voltage	2,000 V (rms)		
Insulation Resistance	5,000 MΩ (Min.)		
Mechanical			
Durability	500 Cycles (Min.)		
Temperature	-45°C to +85 °C (Cable)		
Bending Radius	25.4 mm (Min.)		
Cabling			
Conductor	Copper Clad Aluminum, 1 Core, Ø2.74 mm		
Insulation	PEF, Thickness 2.2 mm, Outer Ø7.24 mm		
Binder	Sealed Aluminum Mylar Tape		
Braid Shield	Aluminum Alloy Wire, 85%↑ Coverage		
Jacket	PVC or PE, Outer Ø10.3±0.25 mm		
Connector			
Body	Brass, Ni or Tri-alloy Surface Plating		
Center Conductor	Brass, Au or Ag Surface Plating		
Insulator	PTFE		
Other	Brass, Ni Surface Plating		
Certification(s)			
IEC	IEC 60169-16		



Diagram

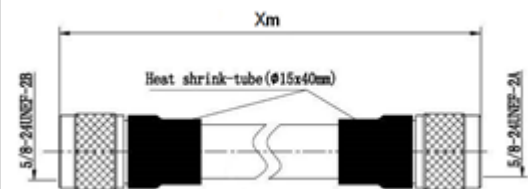

Ordering Information

Part Number: GE.CA-N002-04

2m Ø10mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR400 Cable

Part Number: GE.CA-N003-04

3m Ø10mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR400 Cable

Part Number: GE.CA-N005-04

5m Ø10mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR400 Cable
Please contact us for other cable lengths.

¹the loss values have tolerance of up to 0.4 dB

Version: 04 Mar 2021


Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Ø5mm RF Cable (LMR200) | External Antenna Connection Specifications

Electrical			
			Special Item
Length	1 m	2 m	3m
VSWR (Max.)	1.20 (0 to 3 GHz); 1.35 (3 to 6 GHz)		
Loss (Cable Only) ¹	1 m	2 m	3m
Loss @900 MHz, dB	0.326	0.652	0.978
Loss @2 GHz, dB	0.393	0.986	1.479
Loss @2.5 GHz, dB	0.554	1.108	1.662
Loss @5.8 GHz, dB	0.865	1.730	2.593
Loss (with 2 Connectors) ¹	1 m	2 m	3m
Loss @900 MHz, dB	0.626	0.952	1.278
Loss @2 GHz, dB	0.793	1.286	1.779
Loss @2.5 GHz, dB	0.854	1.408	1.962
Loss @5.8 GHz, dB	1.165	2.030	2.895
Impedance	50 Ω (Nominal)		
Frequency Range	DC to 6 GHz (Max.)		
Dielectric Withstanding Voltage	2,000 V (rms)		
Insulation Resistance	5,000 MΩ (Min.)		
Mechanical			
Durability	500 Cycles (Min.)		
Temperature	-45°C to +85 °C (Cable)		
Bending Radius	12.7 mm (Min.)		
Cabling			
Conductor	Bare Copper Wire, 1 Core, Ø1.12 mm		
Insulation	PEF, Outer Ø2.95 mm		
Binder	Sealed Aluminum Mylar Tape		
Braid Shield	Tinned Copper Wire, 88%↑ Coverage		
Jacket	PVC or PE, Outer Ø5 mm		
Connector			
Body	Brass, Ni or Tri-alloy Surface Plating		
Center Conductor	Brass, Au or Ag Surface Plating		
Insulator	PTFE		
Other	Brass, Ni Surface Plating		
Certification(s)			
IEC	IEC 60169-16		



Diagram

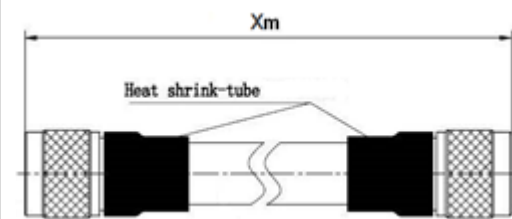

Ordering Information

Part Number: GE.CA-N001-02

1m Ø5mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR200 Cable

Part Number: GE.CA-N002-02

2m Ø5mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR200 Cable

Part Number: GE.CA-N003-02

3m Ø5mm RF Cable with 2 N-male Connectors
- using Times Microwave Systems LMR200 Cable
Please contact us for other cable lengths.

¹the loss values have tolerance of up to 0.4 dB

Version: 04 Mar 2021

Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

RF Lightning Protector 0-6GHz | Special Item


Protecting AN Device from Surging Through Antenna Port

Specifications

Electrical	
Surge Protector Type	Gas Tube
Frequency Range	0 to 6 GHz
Impedance	50 Ω
VSWR	1.3:1 (Max.)
Insertion Loss	0.4 dB (Max.)
Gas Tube Breakdown Voltage	230 V
Surge Current	10 kA
Mechanical	
Connectors	N-male to Bulkhead N-female
Connector Body Material	Nickel Plated Brass
Body Material	Nickel Plated Brass
Pin Material	Gold Plated Brass
O-ring Material	Rubber
Environmental	
Temperature	-55 to 155 degree C (Operating)
Ingress Protection	IP67
Compliance	RoHS



Diagram

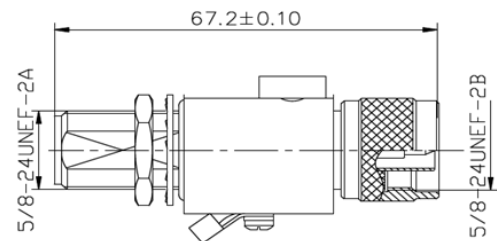

Ordering Information

Part Number: GE.CA-LP06-00

External RF Lightning Protector 0-6GHz
 - IP67, 10kA Surge Current, Multi-strike Capability,
 230V Gas Tube Breakdown Voltage, N-male to N-female

Version: 03 Aug 2020

Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

RF Lightning Protector 2-6GHz | Special Item

Protecting AN Device from Surging Through Antenna Port

Specifications

Overview

RF Lightning Protector (also known as lightning arrestor) utilizing a patented DC shorted filter design enables an almost instantaneous response to a lightning surge to protect critical hardware such as X20 and X30 series Anywhere Network Nodes while maintaining the RF performance. This RF lightning protector component is manufactured in a coaxial in-line design with wide operating frequency range.

Features

- Surge current up to 10kA
- Maximum power 10W
- Frequency range from 2GHz to 6GHz
- N-type female connectors
- Waterproof IP67 rated
- DC Block
- VSWR < 1.3 : 1
- Multi-strike capability
- CE and RoHS compliant

Electrical

Surge Protector Type	Surge Filter
DC Handling	DC Block
Frequency Range	2 to 6 GHz
Impedance	50 Ω
VSWR	1.3:1 (Max.); 1.2:1 (Typ.)
Return Loss	20 dB (Typ.)
Insertion Loss	0.2 dB (Max.); 0.1 dB (Typ.)
Input Power, CW	10 W
Surge Current	10 kA (IEC 61000-4-5 8/20 μs Waveform)
Throughput Energy	0.5 μJ (For 3 kA@8/20μs Waveform)

Mechanical


Input Connector	N-female
Output Connector	N-male

Environmental

Temperature	-40 to 85 degree C (Operating)
Ingress Protection	IP67
Compliance	RoHS



Diagram

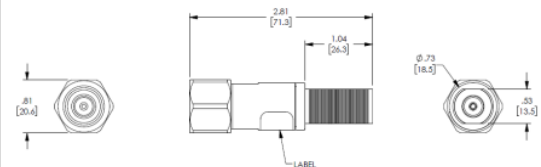

Ordering Information

Part Number: GE.CA-LP26-00

External RF Lightning Protector 2-6GHz
- DC block, 10W, IP67, 10kA Surge Filter, Multi-strike Capability, N-male to N-female

Version: 03 Aug 2020

Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.