

## X20 Anywhere Network Node



X20 Anywhere Network Node is a high-performance dual 5 GHz radios wireless backhaul unit designed for flexible and expandable deployment regardless of physical constraints.

Our Connectivity Technology breaks the traditional hopping limitation of wireless networks by tackling the multi-hop bandwidth degradation, enables X20 to extend connectivity to the locations where extensive fiber optic cabling is unfeasible due to a tight timescale and supports over 10 hops and up to 600 Mbps world's leading end-to-end ring topology backhauling speed.


### Ultra high throughput wireless surveillance backhauling

- Up to 600 Mbps throughput
- IP 67 weatherproof

### Greater than 10 hops backhauling

- 20/40/80 MHz channel
- 2 × 5 GHz radio

## Deployment Architecture

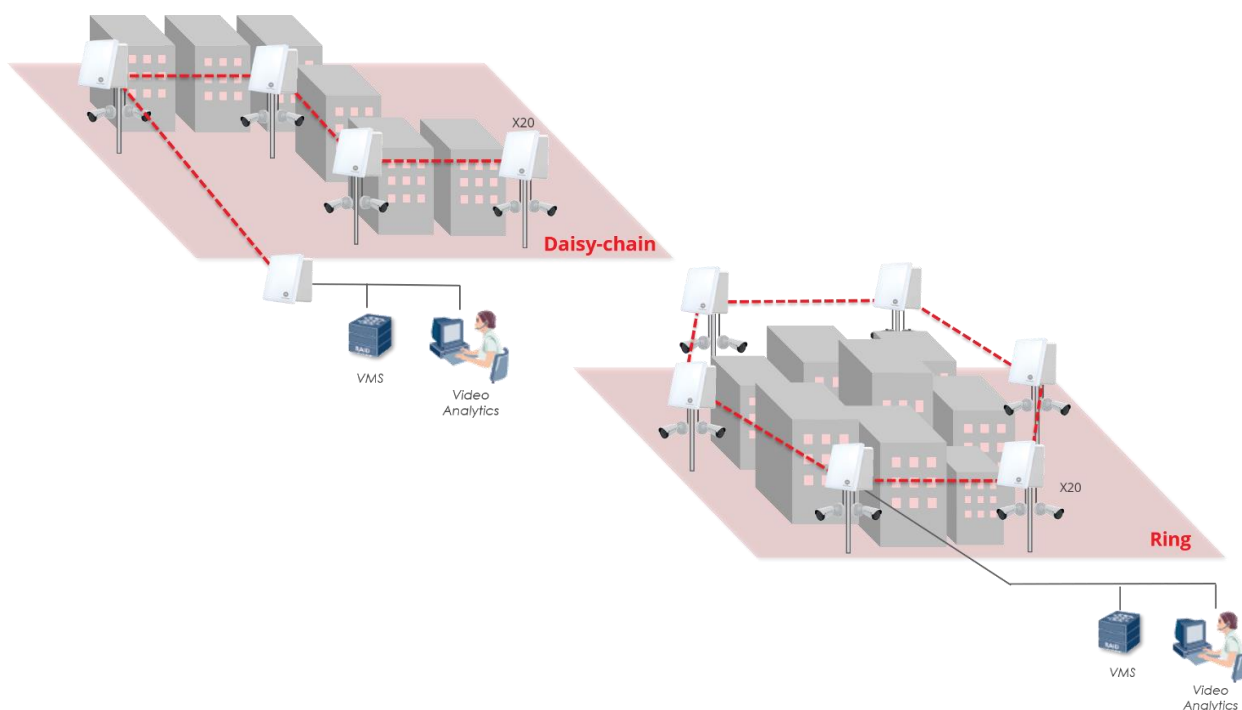

## X20 Anywhere Network Node Specifications

Wireless		
Operating Frequency <sup>1</sup>	5.150 - 5.350 GHz 5.470 - 5.850 GHz	
Modulation	OFDM: BPSK, QPSK,16QAM, 64QAM,256QAM DSSS: DBPSK, DQPSK, CCK	
No. of Spatial Stream	2×2: 2 MIMO	
Channel Bandwidth <sup>1</sup>	20/40/80 MHz Channel	
Data Rate	173 Mbps (20MHz); 400 Mbps (40 MHz); 867 Mbps (80 MHz)	
Receive Sensitivity	-91 dBm (20 MHz); -88 dBm (40 MHz); -85 dBm (80 MHz)	
Transmit Power	27 dBm (Max)	
Features	Spectrum Scan, Antenna Alignment	
Antenna		
Connected To	Radio 0	Radio 1
Type	Built-in 5 GHz	External 5 GHz
Gain	19 dBi	Optional Antennas: 5 GHz 19 dBi Panel; More Options on Request
Polarization	Vertical & Horizontal	
Horizontal Beamwidth	17°	
Vertical Beamwidth	17°	
VSWR	1.8 (Max.)	
Front-to-back Ratio	-25 dB (Min.)	
Isolation	35 dB (Min.)	
Network		
Topology	Point-to-Point (PtP), Point-to-Multipoint (PtMP), Daisy-chain and Ring	
Redundancy	Flow-based Routing, Multiple Drop-off Point, Bonded Link	
Mobility	Mobile Mode	
Path Selection	Bandwidth-based Metrics Load Balancing, Traffic Load Aware Load Balancing	
Traffic Optimization	BUM Traffic Management	
Features	End-to-End Layer 2 Transparent, VLAN 802.11Q Pass-through, Node Recovery	
Security		
Link Encryption	128-bit AES	
Client MAC Access Control	Whitelist <sup>2</sup> , Blacklist	
Neighbor MAC Access Control	Whitelist, Blacklist	

Management	
User Interface	Anywhere Node Manager (A-NM) for A-OS
Support	Remote Firmware Upgrade, Network Time Sync, SNMP v1/v2c <sup>2</sup> , MIB support <sup>2</sup>
Hardware	
No. of Radio	2x5 GHz Radio
Network Interface	1xGE & PoE Port
LED	RUN; LAN; RADIO 0; RADIO 1
Power Supply	802.3at PoE Injector
Power Consumption	25 W (Max.)
Antenna Movement	±30° Up/Down-tilt
MTBF	350,000 hours (50 °C)
Physical Characteristics	
Dimensions	270 × 270 × 80 mm (w/o Mounting)
Weight	1.86 kg (Net w/o Mounting); 2.39 kg (Net w/ Mounting); 2.66 kg (Gross)
Mounting	Pole Mounting (ø40 to ø52 mm)
Environmental	
Temperature	-40 °C to 65 °C (Operating)
Humidity	5% to 95 % Non-condensing
Elevations	86 to 106 kPa
Wind Loading	256 km/h (Max.)
Weatherproof	IP67, 6 kV Common Mode Surge Protection
Certification	
FCC, CE, RCM, KC, OFC	
Standard Warranty	
First year free limited hardware warranty and firmware upgrade. The 1/3/5-year extended warranties are available under specific purchase terms and conditions.	
Ordering Information	
Part Number	GE.AP-X200-00
Description	X20 Anywhere Network Node

<sup>1</sup>operating frequency, transmit power and channel bandwidth vary by country/region settings

<sup>2</sup>available in the future updates

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit [www.anywherenetworks.com](http://www.anywherenetworks.com) or contact [sales@anywherenetworks.com](mailto:sales@anywherenetworks.com) for more details.