
# Dual-band 5/7 dBi Omni Antenna

## Specifications


| Electrical | | |
|---|---|---|
| Frequency Range | 2.4 – 2.5 GHz | 5.15 – 5.875 GHz |
| Gain | 4.5 dBi (Peak)<br>2.5 dBi (Average) | 7.0 dBi (Peak)<br>5.0 dBi (Average) |
| Polarization | Linear, Vertical | |
| Horizontal Beamwidth | 360° (-3 dB) | |
| Vertical Beamwidth | 30° (-3 dB) | 20° (-3 dB) |
| VSWR | 2.0 (Max.) | |
| Impedance | 50 Ω | |
| Power Handling | 2 W (cw) | |
| Lightning Protection | DC Grounded | |
| **Environmental** | | |
| Temperature | -40 °C to +80 °C | |
| Humidity | 95% at 55°C | |
| Wind Loading | 216 km/hr (Survival) | |
| Weatherproof | IPX8 | |
| **Mechanical** | | |
| Radome Material | ABS, UV Resistant, UL94 HB | |
| Radome Color | White | |
| Weight | 70 g | |
| Dimensions | Ø22 x 183 mm | |
| Connector | N-male | |

**Dimensions Diagram**



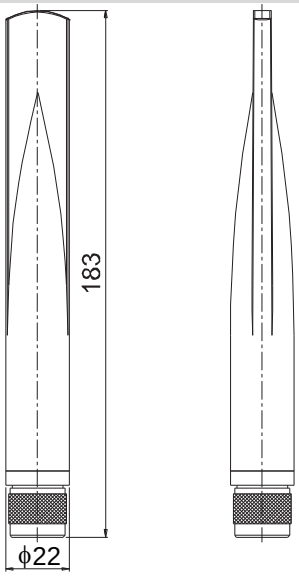


**Antenna Patterns**

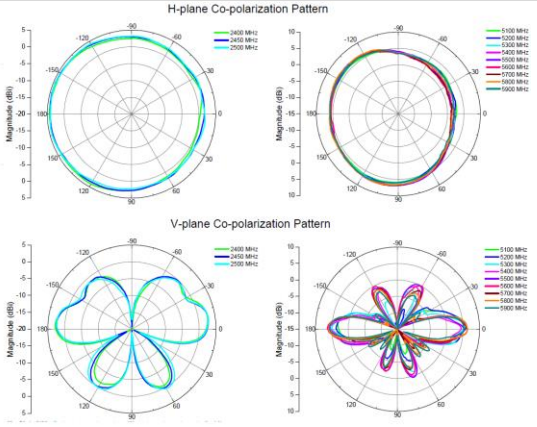


**Ordering Information**

| |
|---|
| Part Number: GE.AN-OM05-DB |
| Dual-band 2.4GHz 5dBi, 5GHz 7dBi Omni Antenna - N-male Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# Dual-band 8 dBi Omni Antenna

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 5.100 – 5.875 GHz |
| Gain | 8±1 dBi |
| Polarization | Linear, Vertical |
| Horizontal Beamwidth | 360° |
| Vertical Beamwidth | 12° (-3 dB) |
| Side Lobes Level | -8 dB (Max.) |
| VSWR | 2.0 (Max.) |
| Impedance | 50 Ω |
| Power Handling | 2 W (cw) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +80 °C |
| Humidity | 95% at 55°C |
| Wind Loading | 216 km/hr (Survival) |
| Waterproof | IP67 |
| **Mechanical** | |
| Radome Material | ABS, UV Resistant |
| Radome Color | Grey |
| Weight | 97 g |
| Dimensions | Ø22 x 308.5 mm |
| Connector | N-male |


**Dimensions Diagram**

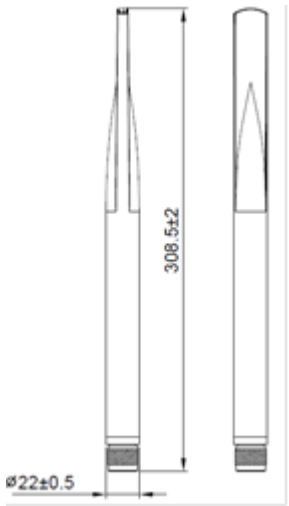




**Antenna Patterns**

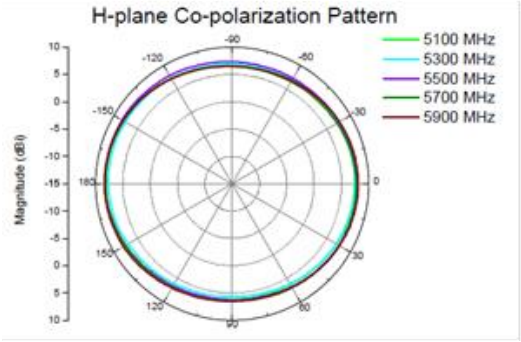

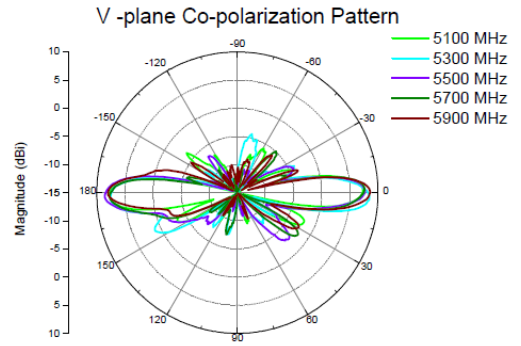
**Ordering Information**

| |
|---|
| Part Number: GE.AN-OM08-5G |
| 5GHz, 8dBi Omni Antenna<br>- N-male Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 10dBi Omni Antenna

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 5.100 – 5.825 GHz |
| Gain | 10 dBi (5.500 – 5.825 GHz)<br>3 – 8 dBi (5.100 – 5.500 GHz) |
| Polarization | Linear, Vertical |
| Horizontal Beamwidth | 360° (-3 dB) |
| Vertical Beamwidth | 7° (-3 dB) |
| Side Lobes Level | -1 dB (Max.) |
| VSWR | 2.0 (Max.) |
| Impedance | 50 Ω |
| Power Handling | 6 W (cw) |
| **Environmental** | |
| Temperature | -40 °C to +80 °C |
| Humidity | 95% at 55°C |
| Wind Loading | 216 km/hr (Survival) |
| **Mechanical** | |
| Radome Material | Fiberglass, UV Resistant |
| Radome Color | Grey-white |
| Weight | 135 g |
| Dimensions | Ø21 x 513 mm |
| Connector | N-male |


**Dimensions Diagram**

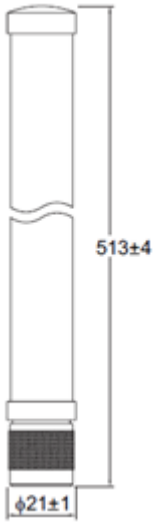




**Antenna Patterns**

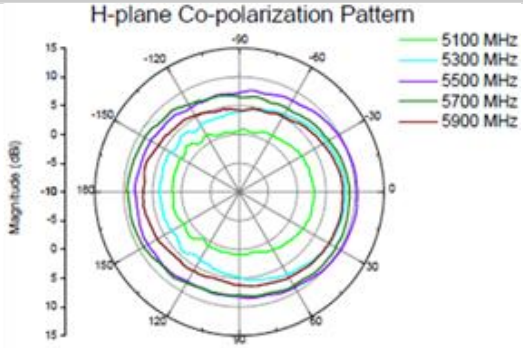

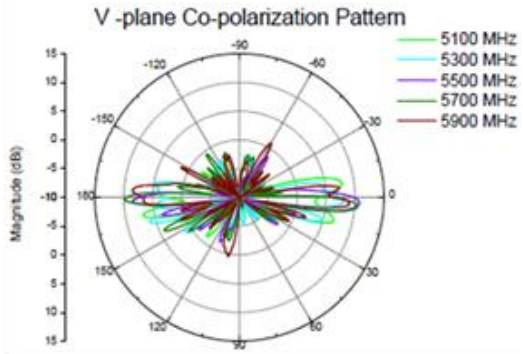
**Ordering Information**

| |
|---|
| Part Number: GE.AN-OM10-5G |
| 5.5-5.8GHz 10dBi, 5.1-5.5GHz 3-8dBi Omni Antenna - N-male Connector |

Version: 26 Oct 2026


Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 12dBi 2x2 Sector Antenna


## Specifications

| Electrical | |
|---|---|
| Frequency Range | 5.150 – 5.875 GHz |
| Gain | 12 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal Beamwidth | 120° (-3 dB) |
| Vertical Beamwidth | 15° (-3 dB) |
| VSWR | 1.7 (Max.) |
| Front-to-back Ratio | -30 dB (Min.) |
| Cross Polarization | -15 dB (Typ.) |
| Isolation | -20 dB (Typ.) |
| Impedance | 50 Ω |
| Power Handling | 10 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300 019-1-4; EN 302 085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Radome Material | UV Protected Polycarbonate |
| Reflector Material | Aluminum, Protected Through Chemical Passivation |
| Mounting Material | Aluminum |
| Weight | 400 g (Antenna); 760 g (Mounting Kit) |
| Dimensions | 200 x 200 x 33 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole or Wall Mounting |
| Pole Diameter | Ø25 to 120 mm<br>(Screws supplied are 80 mm long) |
| Mechanical Movement | ±45° (Azimuth); ±45° (Elevation) |
| **Mounting Diagram** | |

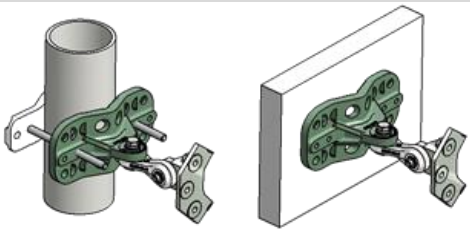



**Antenna Pattern**

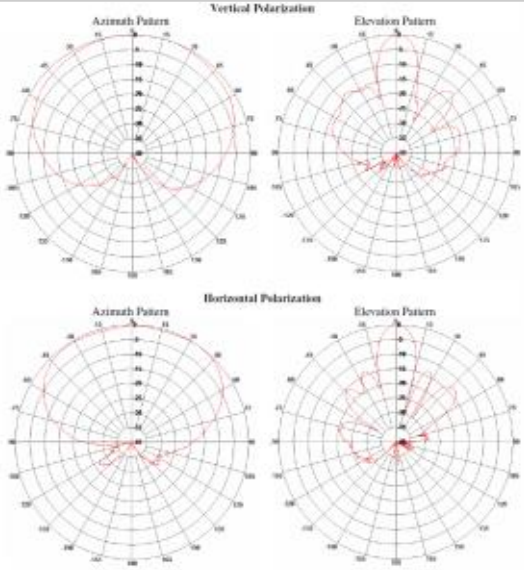


| Ordering Information |
|---|
| Part Number: GE.AN-5P12-02 |
| 5GHz 12dBi 2x2 Sector Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 14dBi 2x2 Sector Antenna | Special Item

## Specifications

| Electrical | |
|---|---|
| Frequency Range | 4.900 – 5.950 GHz |
| Gain | 14.8 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal Beamwidth | 120° (-3 dB) |
| Vertical Beamwidth | 8° (-3 dB) |
| VSWR | 1.8 (Max.) |
| Front-to-back Ratio | -25 dB (Min.) |
| Cross Polarization | -15 dB (Min.) |
| Isolation | -27 dB (Min.) |
| Impedance | 50 Ω |
| Power Handling | 100 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +60 °C |
| Humidity | 5% to 95% |
| Wind Loading | 220 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 (96 hr, Neutral Salt) |
| **Mechanical,** | |
| Radome Material | UPVC |
| Reflector Material | Aluminum Alloy |
| Mounting Material | Hot-galvanized Steel (Screw: Stainless Steel) |
| Weight | 2000 g (Antenna); 800 g (Mounting Kit) |
| Dimensions | 400 x 128 x 56 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole Mounting |
| Pole Diameter | Ø50 to 85 mm |
| Mechanical Movement | ±16° (Up/Down-Tilt) |


**Mounting Diagram**

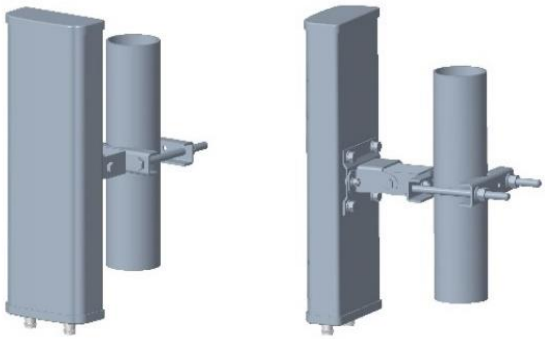




**Antenna Pattern**

Vertical Polarization

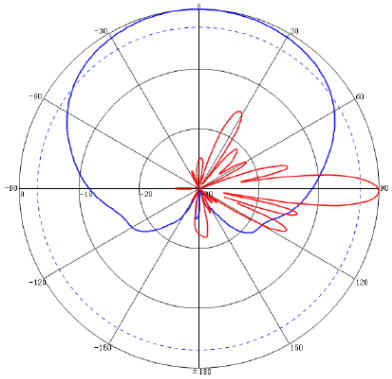

Horizontal Polarization

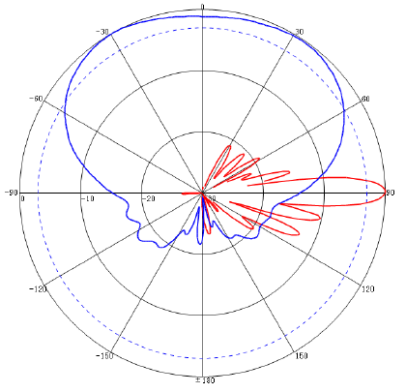

**Ordering Information**

| |
|---|
| Part Number: GE.AN-5S14-02 |
| 5GHz 14dBi 2x2 Sector Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 15 Aug 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 19dBi 2x2 Panel Antenna

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 4.9 – 5.875 GHz |
| Gain | 19 ± 1 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal<br>Dual Slant ±45° if mounted diagonally |
| Horizontal Beamwidth | 16° (-3 dB) |
| Vertical Beamwidth | 16° (-3 dB) |
| Side Lobes Level | ETSI TS2 (Min.) |
| VSWR | 1.7 (Max.) |
| Front-to-back Ratio | -20 dB (Min.), ETSI TS2 |
| Cross Polarization | -20 dB |
| Isolation | -30 dB |
| Impedance | 50 Ω |
| Power Handling | 10 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300 019-1-4; EN 302 085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Radome Material | UV Protected Polycarbonate |
| Reflector Material | Aluminum, Protected Through Chemical Passivation |
| Mounting Material | Aluminum |
| Weight | 400 g (Antenna)<br>760 g (Mounting Kit) |
| Dimensions | 200 x 200 x 33 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole or Wall Mounting |
| Pole Diameter | Ø25 to 120 mm<br>(Screws supplied are 80 mm long) |
| Mechanical Movement | ±45° (Azimuth); ±45° (Elevation) |

**Mounting Diagram**

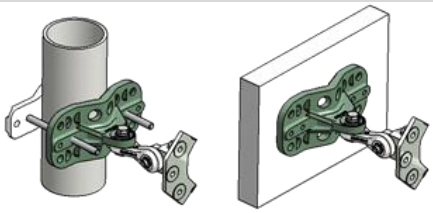



**Antenna Pattern**

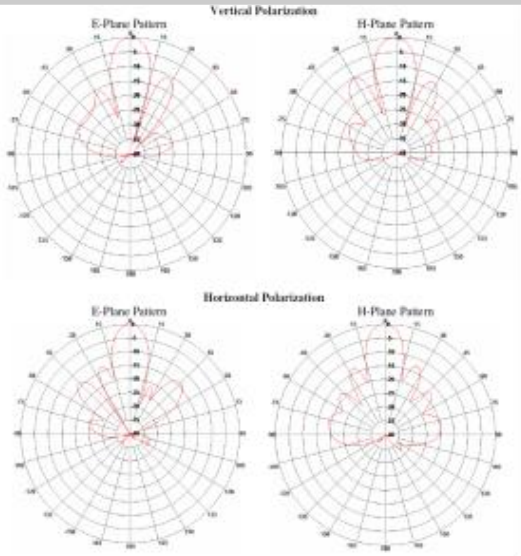


| Ordering Information |
|---|
| Part Number: GE.AN-5P19-02 |
| 5GHz 19dBi 2x2 Panel Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 20dBi 2x2 Panel Antenna | Special Item

## Specifications

| Electrical | |
|---|---|
| Frequency Range | 5.100 – 5.850 GHz |
| Gain | 20 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal Beamwidth | 15° (-3 dB) |
| Vertical Beamwidth | 15° (-3 dB) |
| VSWR | 1.8 (Max.) |
| Front-to-back Ratio | -25 dB (Min.) |
| Cross Polarization | -18 dB (Min.) |
| Isolation | -25 dB (Min.) |
| Impedance | 50 Ω |
| Power Handling | 100 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +60 °C |
| Humidity | 5% to 95% |
| Wind Loading | 216 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Radome Material | ABS |
| Reflector Material | Aluminum Plate |
| Mounting Material | Stainless Steel |
| Weight | 800 g (Antenna); 700 g (Mounting Kit) |
| Dimensions | 400 x 128 x 56 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole Mounting |
| Pole Diameter | Ø40 to 120 mm |
| Mechanical Movement | ±15° (Up/Down Tilt) |


**Mounting Diagram**






**Antenna Pattern**

5.150 – 5.850 GHz Horizontal Polarization




5.150 – 5.850 GHz Vertical Polarization

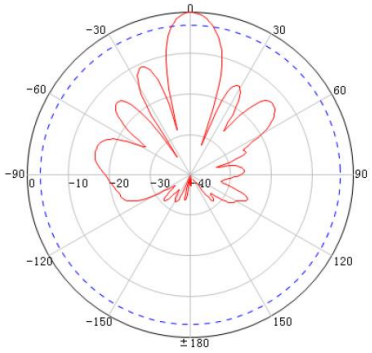


**Ordering Information**

| |
|---|
| Part Number: GE.AN-5P20-02 |
| 5GHz 20dBi 2x2 Panel Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 15 Aug 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.


# 5GHz 22dBi 2x2 Panel Antenna | Special Item

## Specifications

| Electrical | |
|---|---|
| Frequency Range | 4.900 – 6.1000 GHz |
| Gain | 21.5 dBi (4.900 – 5.500 GHz)<br>22.5 dBi (5.500 – 6.100 GHz) |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal and Vertical Beamwidth | 12° (-3 dB, 4.900 – 5.500 GHz)<br>11° (-3 dB, 5.500 – 6.100 GHz) |
| VSWR | 2.0 (Max.) |
| Front-to-back Ratio | -28 dB (Min.) |
| Cross Polarization | -18 dB (Min.) |
| Isolation | -28 dB (Min.) |
| Impedance | 50 Ω |
| Power Handling | 50 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +60 °C |
| Humidity | 5% to 95% |
| Wind Loading | 198 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 (96 hr, Neutral Salt) |
| **Mechanical** | |
| Radome Material | ABS |
| Reflector Material | Aluminum Plate |
| Mounting Material | Steel Sheet, Silver-white Organic Coating |
| Weight | 1,200 g (Antenna); 700 g (Mounting Kit) |
| Dimensions | 315 x 315 x 15 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole Mounting |
| Pole Diameter | Ø30 to 50 mm |
| Mechanical Movement | ±15° (Up/Down Tilt) |


**Mounting Diagram**



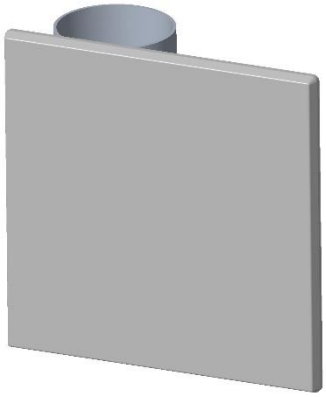


**Antenna Pattern**

Horizontal Polarization

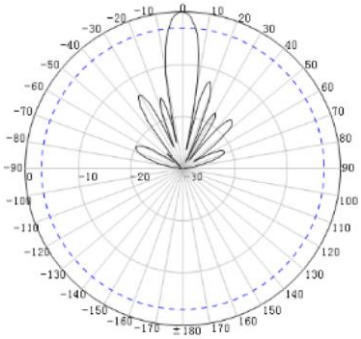

Vertical Polarization

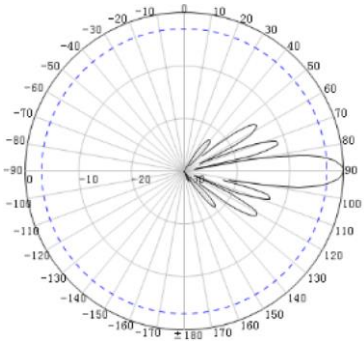

**Ordering Information**

| |
|---|
| Part Number: GE.AN-5P22-02 |
| 5GHz 22dBi 2x2 Panel Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 15 Aug 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 23dBi 2x2 Panel Antenna

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 4.9 – 6.1 GHz |
| Gain | 23 ± 1 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal<br>Dual Slant ±45° if mounted diagonally |
| Horizontal Beamwidth | 10° (-3 dB) |
| Vertical Beamwidth | 10° (-3 dB) |
| Side Lobes Level | ETSI TS3 (Min.) |
| VSWR | 1.7 (Max.) |
| Front-to-back Ratio | -29 dB (Min.), ETSI TS3 |
| Cross Polarization | -20 dB (Typ.) |
| Isolation | -30 dB (Typ.) |
| Impedance | 50 Ω |
| Power Handling | 10 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300 019-1-4; EN 302 085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Radome Material | UV Protected Polycarbonate |
| Reflector Material | Aluminum, Protected Through Chemical Passivation |
| Mounting Material | Aluminum |
| Weight | 900 g (Antenna)<br>820 g (Mounting Kit) |
| Dimensions | 305 x 305 x 15 mm |
| Connector | 2 x N-female |
| Mounting Type | Pole or Wall Mounting |
| Pole Diameter | Ø25 to 120 mm<br>(Screws supplied are 80 mm long) |
| Mechanical Movement | ±45° (Azimuth); ±45° (Elevation) |

**Mounting Diagram**

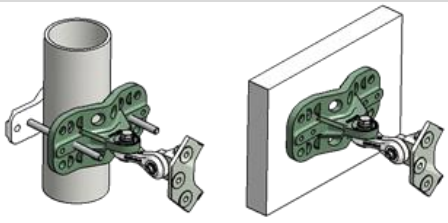



**Antenna Pattern**

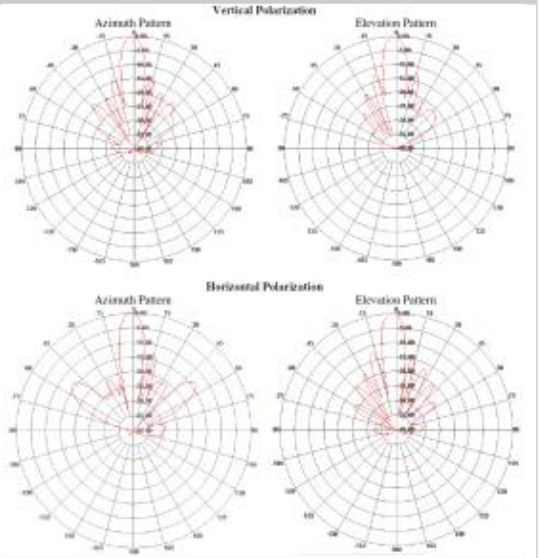


| Ordering Information |
|---|
| Part Number: GE.AN-5P23-02 |
| 5GHz 23dBi 2x2 Panel Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 28dBi 2x2 Panel Antenna

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 5.15 – 5.875 GHz |
| Gain | 28.5 ± 0.5 dBi (Horizontal)<br>29.0 ± 0.5 dBi (Vertical) |
| Polarization | Dual Pole Linear, Vertical and Horizontal<br>Dual Slant ±45° if mounted diagonally |
| Horizontal Beamwidth | 4.7° (-3 dB) |
| Vertical Beamwidth | 4.7° (-3 dB) |
| Side Lobes Level | ETSI TS3 (Min.) |
| VSWR | 1.7 (Max.) |
| Front-to-back Ratio | -29 dB (Min.), ETSI TS3 |
| Cross Polarization | -23 dB (Min.) |
| Isolation | -30 dB (Typ.) |
| Impedance | 50 Ω |
| Power Handling | 10 W (Max.) |
| Lightning Protection | DC Grounded |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300 019-1-4; EN 302 085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP67 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Reflector Material | UV Protected Polycarbonate |
| Mounting Material | Aluminum, Protected Through Chemical Passivation |
| Weight | Galvanized Steel |
| Dimensions | 4.7 kg (Antenna)<br>2 kg (Mounting Kit) |
| Connector | 600 x 600 x 22 mm |
| Mounting Type | 2 x N-female |
| Pole Diameter | Pole or Wall Mounting |
| Mechanical Movement | Ø25 to 100 mm<br>(Screws supplied are 80 mm long) |

**Mounting Diagram**





**Antenna Pattern**

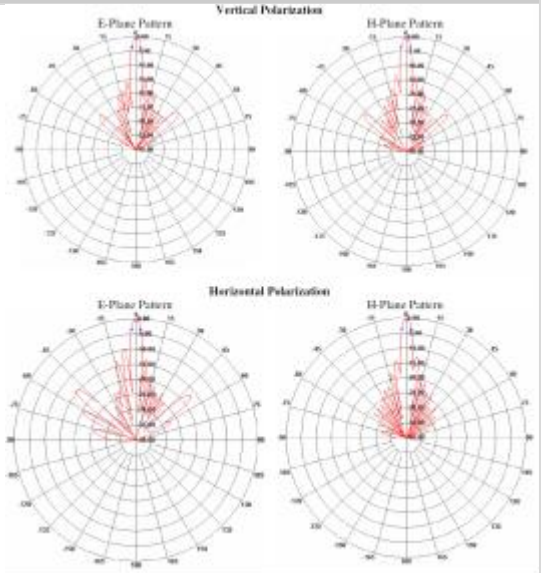


| Ordering Information |
|---|
| Part Number: GE.AN-5P28-02 |
| 5GHz 28dBi 2x2 Panel Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 28dBi 2x2 Dish Antenna | Special Item

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 5.15 – 5.85 GHz |
| Gain | 28.5 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal Beamwidth | 5° (-3 dB) |
| Vertical Beamwidth | 5° (-3 dB) |
| Side Lobes Level | ETSI TS2 |
| VSWR | 1.5 (Max.) |
| Front-to-back Ratio | -35 dB (Min.) |
| Cross Polarization | -20 dB (Min.) |
| Isolation | -28 dB (Min.) |
| Impedance | 50 Ω |
| Power Handling | 100 W (Max.) |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300019-1-4; EN302085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP56 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Reflector Material | UV-coated Aluminum Alloy |
| Mounting Material | Steel |
| Weight | 5.5 kg |
| Dimensions | Ø600 mm (2 ft.) |
| Connector | 2 x N-female |
| Mounting Type | Pole Mounting |
| Pole Diameter | Ø50 to 75 mm |
| Mechanical Movement | 360° (Azimuth); -15° to +5° (Elevation) |

**Mounting Diagram**

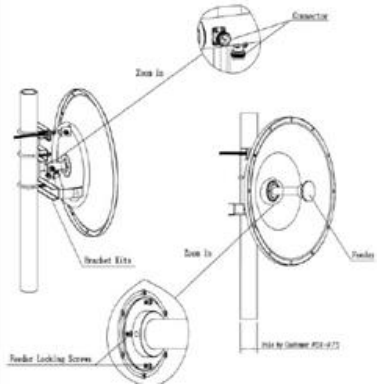



**Antenna Pattern**

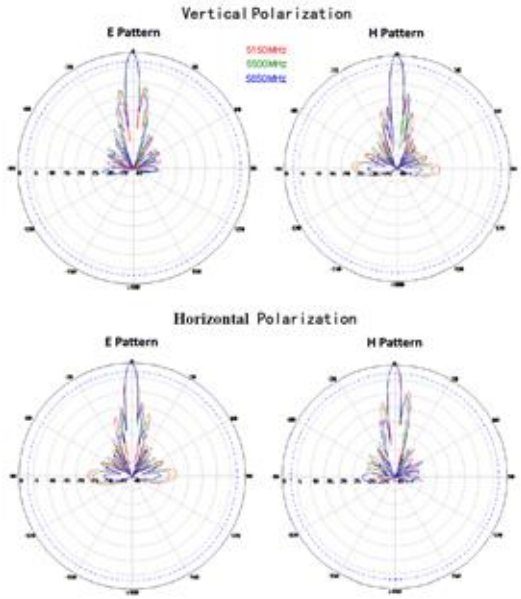


| Ordering Information |
|---|
| Part Number: GE.AN-5D28-02 |
| 5GHz 28dBi 2x2 Ø0.6m Dish Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 32dBi 2x2 Dish Antenna | Special Item

## Specifications


| Electrical | |
|---|---|
| Frequency Range | 5.15 – 5.85 GHz |
| Gain | 32 dBi |
| Polarization | Dual Pole Linear, Vertical and Horizontal |
| Horizontal Beamwidth | 3.5° (-3 dB) |
| Vertical Beamwidth | 3.5° (-3 dB) |
| Side Lobes Level | ETSI TS2 |
| VSWR | 1.5 (Max.) |
| Front-to-back Ratio | -40 dB (Min.) |
| Cross Polarization | -20 dB (Min.) |
| Isolation | -28 dB (Min.) |
| Impedance | 50 Ω |
| Power Handling | 100 W (Max.) |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300019-1-4; EN302085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP56 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Reflector Material | UV-coated Aluminum Alloy |
| Mounting Material | Steel |
| Mounting Material | 10.5 kg |
| Weight | Ø900 mm (3 ft.) |
| Dimensions | 2 x N-female |
| Connector | Pole Mounting |
| Mounting Type | Ø50 to 75 mm |
| Pole Diameter | 360° (Azimuth); -15° to +5° (Elevation) |
| Mechanical Movement | UV-coated Aluminum Alloy |

**Mounting Diagram**

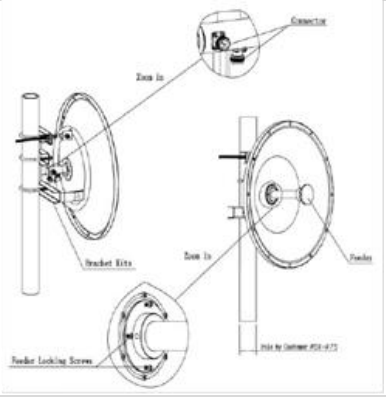



**Antenna Pattern**

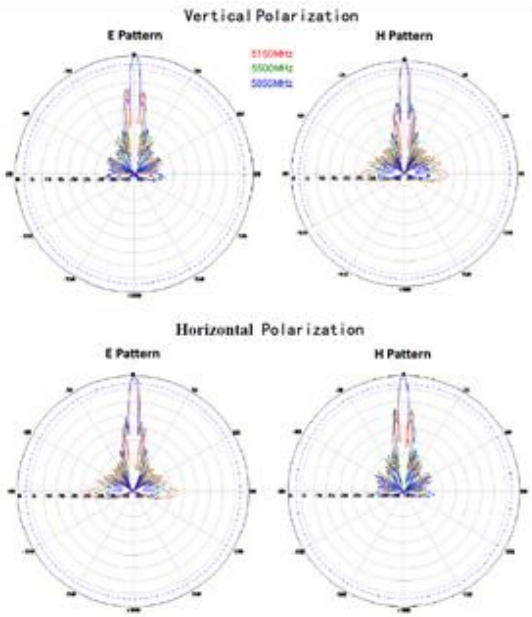


**Ordering Information**

| |
|---|
| Part Number: GE.AN-5D32-02 |
| 5GHz 32dBi 2x2 Ø0.9m Dish Antenna<br>- Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 5GHz 32dBi 2x2 High Performance Dish Antenna

## Specifications | Special Item


| Electrical | |
|---|---|
| Frequency Range | 5.1 – 5.9 GHz |
| Gain | 32 dBi |
| Polarization | Dual Polarized |
| Horizontal Beamwidth | 4° (-3 dB) |
| Vertical Beamwidth | 4° (-3 dB) |
| Side Lobes Level | -15 dB |
| VSWR | 1.7 (Max.) |
| Front-to-back Ratio | -40 dB (Min.) |
| Cross Polarization | -20 dB (Min.) |
| Isolation | -36 dB (Min., 5.1 – 5.6 GHz)<br>-20 dB (Min., 5.6 – 5.8 GHz) |
| Impedance | 50 Ω |
| Power Handling | 100 W (Max.) |
| **Environmental** | |
| Temperature | -40 °C to +65 °C |
| Humidity | ETS 300019-1-4; EN302085 (Annex A.1.1) |
| Wind Loading | 200 km/hr (Survival) |
| Vibration | IEC 60721-3-4 |
| Flammability | UL94 |
| Weatherproof | IP65 |
| Salt Fog | IEC 68-2-11 |
| **Mechanical** | |
| Weight | 18 kg |
| Dimensions | Ø900 mm (3 ft.) |
| Connector | 2 x N-female |
| Mounting Type | Pole Mounting |

**Mounting Diagram**





**Antenna Pattern**

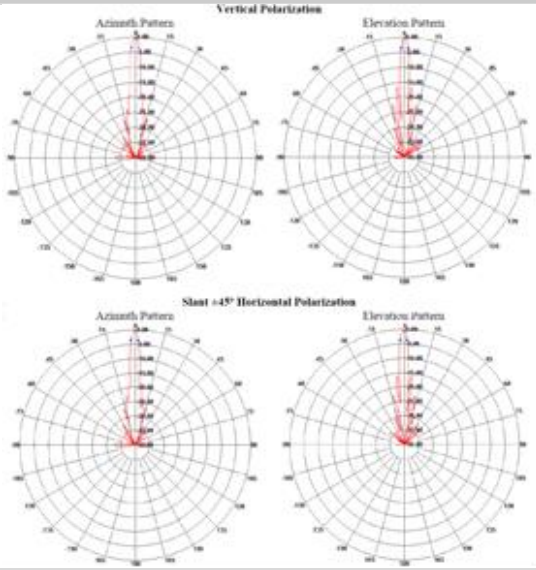


| Ordering Information |
|---|
| Part Number: GE.AN-5D32-H2 |
| 5GHz 32dBi 2x2 High Performance Dish Antenna - Mounting Kit, 2 x N-female Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.


Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.

# 4.9-6GHz 4dBi Mobile Omni Antenna | Special Item

## Specifications

| Electrical | |
|---|---|
| Frequency Range | 4.9 – 6.0 GHz |
| Gain | 4 dBi |
| Polarization | Multi-polarized |
| Horizontal Beamwidth | 360° |
| Vertical Beamwidth | Hemispheric |
| VSWR | 1.1 to 1.5 |
| Impedance | 50 Ω |
| Power Handling | 50 W |
| Lightning Protection | Built-in Ground Plate |
| **Environmental** | |
| Temperature | -40 °C to +85 °C |
| Weatherproof | IP67 |
| **Mechanical** | |
| Reflector Material | UV Stabilized ASA |
| Mounting Material | Black |
| Weight | 340 g (12 oz) |
| Dimensions | Ø115 x 64 mm (Ø4.5 x 2.5 in) |
| Antenna Feed | 2 Feeds |
| Coaxial Pigtail | 2.45 m (8 ft), Low Loss 200 Series |
| Connector | N-male |
| Mounting | 3/4 Stud Mount |


**Mounting Diagram**

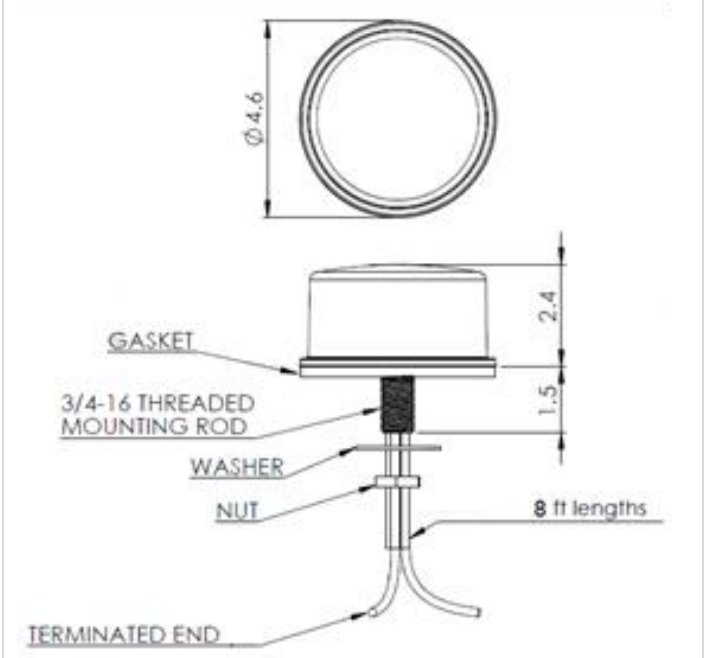




*Product color is for illustration only.

**Antenna Pattern**

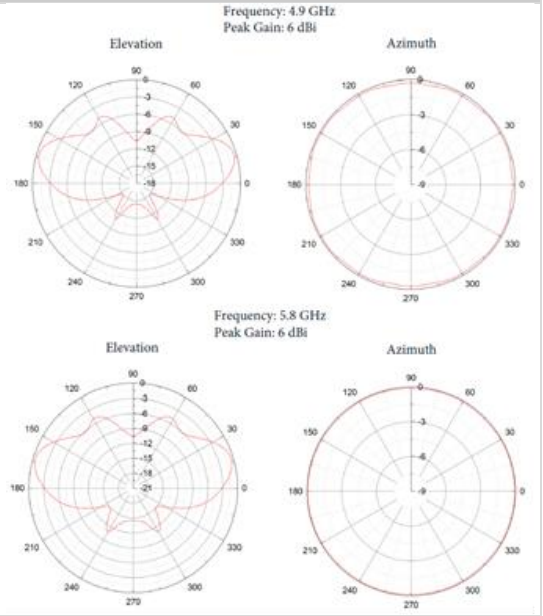


**Ordering Information**

| |
|---|
| Part Number: GE.AN-MM04-B8 |
| 4.9-6GHz, 4dBi, Outdoor Mobile Omni Antenna<br>(Model No.: 08-ANT-0937-BL-2X-G8)<br>- Mounting Nut/Washer, Black, 2 x 8ft 200 Series Coaxial Pigtail with N-male Connector |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.


# Mounting Kit for X20, 150mm Pole | Special Item

## Specifications


| Mechanical | |
|---|---|
| Up and Down-tilt | +/- 45° (in 15° step) |
| Orientation | +/- 75° (in 15° step) |
| Support Pole Diameter | 50 to 150 mm |
| Fit for X20 | Fit Exactly to X20 Using the Original 4 Screw Sets |
| Material | Mount: ADC12 (Aluminum alloy)<br>Metal Tie: 304 stainless steel<br>Screw Set: 304 stainless steel |
| Color | Dark Gray Coating |
| Content | 1 x mount (3 components)<br>2 x metal tie<br>1 x screw pack (2 x screw; 2 x nut; 2 x spring washer; 2 x washer) |



**Mounting Diagram**

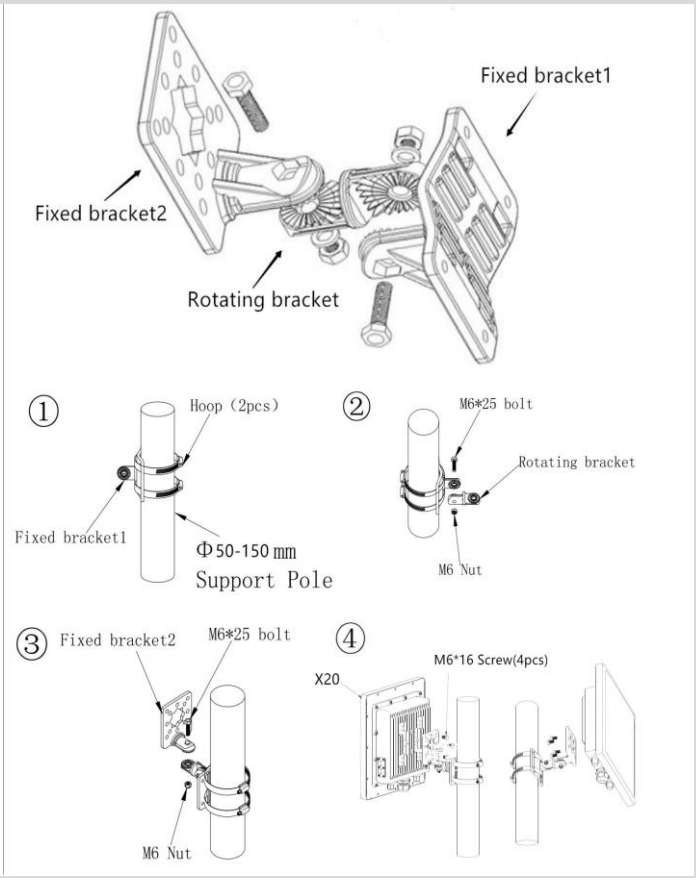


**Dimensions Diagram**

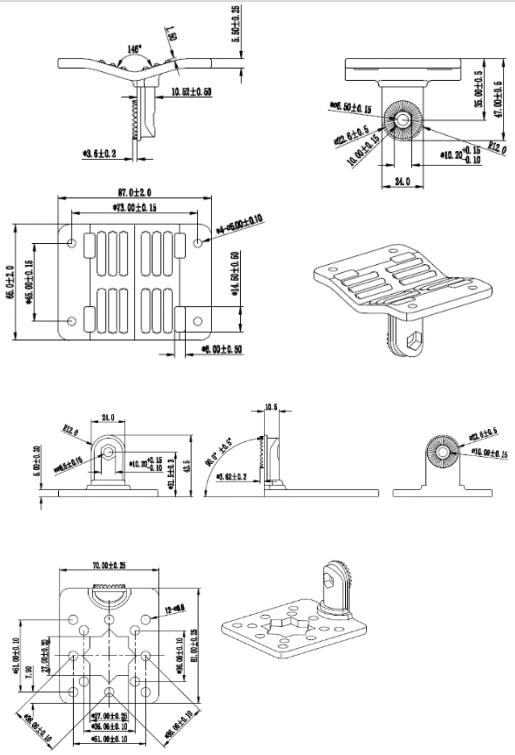

**Ordering Information**

| |
|---|
| Part Number: NS.MT-2150-00 |
| Mounting Kit for X20<br>- Support 50-150mm Diameter Pole |

Version: 26 Oct 2026

Anywhere Networks is a brand name owned by P2 Mobile Technologies Limited. P2 Mobile Technologies Limited reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit www.anywherenetworks.com or contact sales@anywherenetworks.com for more details.

Copyright © 2026 P2 Mobile Technologies Limited. All Rights Reserved.